



FRONT AND REAR ELEVATION





GENERAL CONSTRUCTION NOTES:
-ALL STRUCTURAL LUMBER SHALL BE
PRESSURE TREATED SOUTHERN PINE #2
OR BETTER, UNLESS OTHERWISE NOTED.
-ANY WOOD IN CONTACT WITH
MASONRY OR GROUND CONTACT TO BE
PRESSURE-TREATED WOOD.
-ATTACH EACH ROOF BOARD TO EACH
FRAMING MEMBER w/ (2) 1/2" CROWN x 2"
LEG x 16 GAUGE STAPLES OR (2) 2 1/2"
WOOD SCREWS.

-ATTACH WALL SHEATHING TO EACH FRAMING MEMBER W/ 8d NAILS 12" O.C. INTERMEDIATE AND 6" O.C. ALONG EDGES -ALL HARDWARE TO BE GALVINIZED, POWDER COATED, STAINLESS STEEL, OR AS NOTED -ALL SCREWS #10, LENGTH PER DRAWING OR AS NOTED

-ALL CONCRETE TO BE 3500 PSI (MIN.)

Building Size Site Address

12x16 Vinyl Pavilion Open Gable A-Frame BYS P.O. ##### Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333





The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

December 5, 2023


т. д. Р. SHEET NO. А-1


m, 2

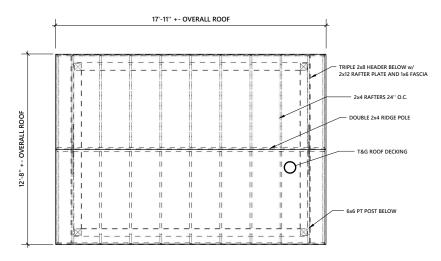



ROOF FRAMING PLAN





ASPHALT SHINGLES WARRIOR ROOFING ELEPHANT SKIN ROOF UNDERLAYMENT 1x6 T&G ROOF DECKING 2x4 RAFTERS @ 24" O.C. 2x12 RAFTER PLATE	(2) 2x4 RIDGE PC	
5/4 x 6 FASCIA BOARD		HIGHT THE
(3) 2x8 HEADER	STEEL L-BRACKET TO ATTACH POST TO CONCRETE FOOTING; USE (2) PER POST (SEE L-BRACKET DETAIL) 1/8" THICK STAINLESS STEEL STAND-OFF PLATE BETWEEN BASE OF POST AND CONCRETE TOP_OF_EOOTING LINE	8' 0" POST HEIGHT
FOOTING AT EACH POST LOCATION (TOTAL OF 4)	CROSS SECTION	16"

Special Notes/	'Comments
----------------	-----------

P:11: 0:	o': +11
Building Size	Site Address
12x16 Vinyl Pavilion Open Gable A-Frame BYS P.O. #####	Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

December 5, 2023

P. A-2