


## FRONT AND REAR ELEVATION





**LEFT AND RIGHT ELEVATION** 

GENERAL CONSTRUCTION NOTES: -ALL STRUCTURAL LUMBER SHALL BE PRESSURE TREATED SOUTHERN PINE #2 OR BETTER, UNLESS OTHERWISE NOTED. -ANY WOOD IN CONTACT WITH MASONRY OR GROUND CONTACT TO BE PRESSURE-TREATED WOOD. -ATTACH EACH ROOF BOARD TO EACH FRAMING MEMBER w/ (2) 1/2" CROWN x 2" LEG x 16 GAUGE STAPLES OR (2) 2 1/2" WOOD SCREWS.

-ATTACH WALL SHEATHING TO EACH FRAMING MEMBER w/ 8d NAILS 12" O.C. INTERMEDIATE AND 6" O.C. ALONG EDGES -ALL HARDWARE TO BE GALVINIZED, POWDER COATED, STAINLESS STEEL, OR AS NOTED -ALL SCREWS #10, LENGTH PER DRAWING OR AS NOTED

-ALL CONCRETE TO BE 3500 PSI (MIN.)

**Building Size** Site Address

12x18 Vinyl Pavilion Hip-Roof BYS P.O. #####

**Customer Name** 0011 Stuart Tarce City, State Zip-Code 111-222-3333





The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

December 5, 2023

SHEET NO. A-1


m.J.P.

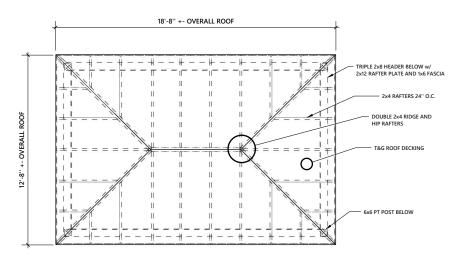




## HEADER TO POST CONNECTION DETAIL NO SCALE

## **ROOF FRAMING PLAN**





WARRIOR ROOFING ELEPHANT SKIN ROOF UNDERLAYMENT  1x6 T&G ROOF DECKING  2x4 RAFTERS @ 24" O.C. (2) 2x4 HIP RAFTERS  2x12 RAFTER PLATE	(2) 2x4 RIDGE PO	]6
5/4 x 6 FASCIA BOARD (3) 2x8 HEADER		HEIGH
	STEEL L-BRACKET TO ATTACH POST TO  CONCRETE FOOTING; USE (2) PER POST (SEE L-BRACKET DETAIL)  1/8" THICK STAINLESS STEEL STAND-OFF PLATE BETWEEN BASE OF POST AND CONCRETE  TOP OF FOOTING LINE	8' 0" POST HEIGHT 11' 5" OVERALL HEIGHT
16" DIA.x 36" DEEP FOOTING AT EACH POST LOCATION (TOTAL OF 4)	CROSS SECTION	16"

Special Notes/Comments

Building Size	Site Address	
12x18 Vinyl Pavilion Hip-Roof BYS P.O. #####	Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333	



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

December 5, 2023

SHEET NO.

A-2