

FRONT AND REAR ELEVATION





GENERAL CONSTRUCTION NOTES: -ALL STRUCTURAL LUMBER SHALL BE PRESSURE TREATED SOUTHERN PINE #2 OR BETTER, UNLESS OTHERWISE NOTED. -ANY WOOD IN CONTACT WITH MASONRY OR GROUND CONTACT TO BE PRESSURE-TREATED WOOD. -ATTACH EACH ROOF BOARD TO EACH FRAMING MEMBER w/ (2) 1/2" CROWN x 2" LEG x 16 GAUGE STAPLES OR (2) 2 1/2"

WOOD SCREWS. -ATTACH WALL SHEATHING TO EACH FRAMING MEMBER w/ 8d NAILS 12" O.C. INTERMEDIATE AND 6" O.C. ALONG EDGES -ALL HARDWARE TO BE GALVINIZED, POWDER COATED, STAINLESS STEEL, OR AS NOTED -ALL SCREWS #10, LENGTH PER DRAWING OR AS NOTED

-ALL CONCRETE TO BE 3500 PSI (MIN.)

Building Size Site Address

14x16 Vinyl Pavilion Hip-Roof BYS P.O. #####


Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333




The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572


November 28, 2023


SHEET NO. A-1

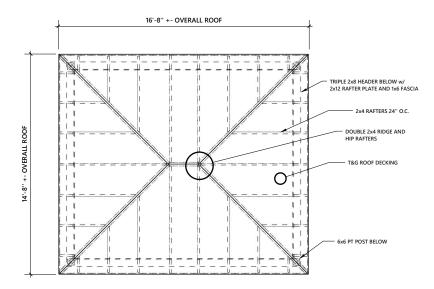



ROOF FRAMING PLAN





WARRIOR ROOFING ELEPHANT SKIN ROOF UNDERLAYMENT	(2) 2x4 RIDGE POLE	
1x6 T&G ROOF DECKING —		<u> </u>
2x4 RAFTERS @ 24" O.C (2) 2x4 HIP RAFTERS	6 12 6	L
2x12 RAFTER PLATE		.HE
5/4 x 6 FASCIA BOARD	<u>w</u>	, H
(3) 2x8 HEADER		WER/
6x6 PT POSTS		8:0" POST HEIGHT
STEEL L-BRACKET TO ATTACH POST TO CONCRETE- USE (2) PER POST (SEE DETAIL)		8'-0" PC
16" DIA. x 36" DEEP	4" THICK CONCTRETE SLAB (OVERALL SIZE TBD BY OWNER)	
FOOTER @ EACH POST LOCATION (TOTAL OF 4)		7 7 7
	4" CRUSHED STONE BASE	36"
	CROSS SECTION 16"	<u> </u>

Special Notes/Comments

Building Size	Site Address
14x16 Vinyl Pavilion Hip-Roof BYS P.O. #####	Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333



ASPHALT SHINGLES

The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

November 28, 2023

SHEET NO. A-2