


FRONT AND REAR ELEVATION





OR BETTER, UNLESS OTHERWISE NOTED. -ANY WOOD IN CONTACT WITH MASONRY OR GROUND CONTACT TO BE PRESSURE-TREATED WOOD. -ATTACH EACH ROOF BOARD TO EACH FRAMING MEMBER w/ (2) 1/2" CROWN x 2" LEG x 16 GAUGE STAPLES OR (2) 2 1/2"

GENERAL CONSTRUCTION NOTES: -ALL STRUCTURAL LUMBER SHALL BE PRESSURE TREATED SOUTHERN PINE #2

WOOD SCREWS.

-ATTACH WALL SHEATHING TO EACH FRAMING MEMBER w/ 8d NAILS 12" O.C. INTERMEDIATE AND 6" O.C. ALONG EDGES -ALL HARDWARE TO BE GALVINIZED, POWDER COATED, STAINLESS STEEL, OR AS NOTED -ALL SCREWS #10, LENGTH PER DRAWING

OR AS NOTED -ALL CONCRETE TO BE 3500 PSI (MIN.)

Site Address

16x20 Vinyl Pavilion Open Gable A-Frame BYS P.O. #####

Building Size


Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333




The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572


November 21, 2023

SHEET NO. A-1

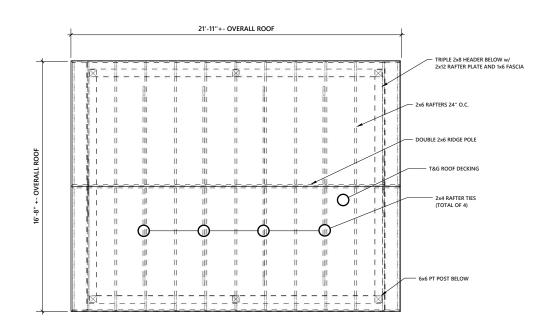



(2) 2x6 RIDGE POLE



1/8" THICK
STEEL ANGLE
HOLES FOR
(5) #8 x 2½" WOOD
SCREWS TO
ATTACH TO POST
HOLE FOR 1/2" DIA x 4" CONCRETE
ANCHOR EMBEDDED 3½" (MIN.)
INTO CONCRETE FOUNDATION
STEEL L-BRACKET DETAIL
NO SCALE

ASPHALT SHINGLES 1x6 T&G ROOF DECKING 2x6 RAFTERS 24" O.C. (1) SIMPSON A23Z ANGLE AT EACH RAFTER FASTEN RAFTER TIE 2x4 RAFTER TIE TO EACH RAFTER w/ 1x6 FASCIA BOARD (8) 2 1/2" WOOD 2x12 RAFTER PLATE SCREWS (3) 2x8 HEADER 8'-0" POST HEIGHT 6x6 PT POSTS 15'-01/4" POST CENTERS STEEL L-BRACKET TO ATTACH POST TO FOOTING; 1/8" THICK STAINLESS 4" THICK CONCTRETE SLAB STEEL PLATE BETWEEN (OVERALL SIZE TBD BY OWNER) BOTTOM OF POST AND CONCRETE TOP OF FOOTING LINE DIA. x DEEP CONCRET PIER FOOTING AT EACH POST LOCATION CRUSHED STONE BASE **CROSS SECTION**

Special Notes/Comments

Building Size

Site Address

Customer Name
0011 Stuart Tarce
Open Gable A-Frame
BYS P.O. #####
City, State Zip-Code

111-222-3333



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

November 21, 2023

SHEET NO. **A-2**

m.J.P.