



FRONT AND REAR ELEVATION

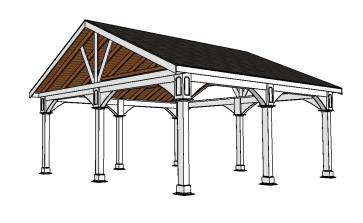

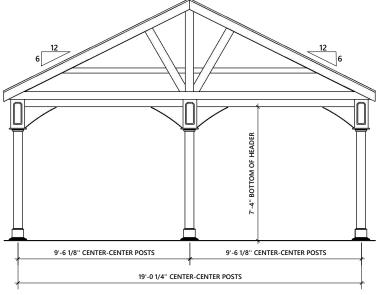

LEFT AND RIGHT ELEVATION

GENERAL CONSTRUCTION NOTES: -ALL STRUCTURAL LUMBER SHALL BE PRESSURE TREATED SOUTHERN PINE #2 OR BETTER, UNLESS OTHERWISE NOTED. -ANY WOOD IN CONTACT WITH MASONRY OR GROUND CONTACT TO BE PRESSURE-TREATED WOOD. -ATTACH EACH ROOF BOARD TO EACH FRAMING MEMBER w/ (2) 1/2" CROWN x 2" LEG x 16 GAUGE STAPLES OR (2) 2 1/2" WOOD SCREWS.

-ATTACH WALL SHEATHING TO EACH FRAMING MEMBER w/ 8d NAILS 12" O.C. INTERMEDIATE AND 6" O.C. ALONG EDGES -ALL HARDWARE TO BE GALVINIZED, POWDER COATED, STAINLESS STEEL, OR AS NOTED -ALL SCREWS #10, LENGTH PER DRAWING OR AS NOTED

-ALL CONCRETE TO BE 3500 PSI (MIN.)

Building Size Site Address

20x20 Vinyl Pavilion Open Gable A-Frame BYS P.O. #####

Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

November 17, 2023

SHEET NO. A-1

