



LEFT AND RIGHT ELEVATION

FRONT AND REAR ELEVATION



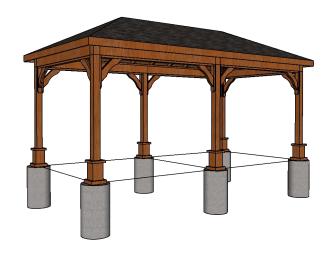

GENERAL CONSTRUCTION NOTES:
-ALL STRUCTURAL LUMBER SHALL BE
PRESSURE TREATED SOUTHERN PINE #1,
APPEARANCE GRADE WESTERN RED CEDAR
OR AS SELECTED OR OTHERWISE NOTED.
-ATTACH EACH ROOF BOARD TO EACH
FRAMING MEMBER w/ (2) 1/2" CROWN x 2"
LEG x 16 GAUGE STAPLES OR (2) 2 1/2"
WOOD SCREWS.
-ATTACH WALL SHEATHING TO EACH
FRAMING MEMBER w/ 8d NAILS 12" O.C.
INTERMEDIATE AND 6" O.C. ALONG EDGES
-ALL HARDWARE TO BE GALVINIZED,
POWDER COATED, STAINLESS STEEL,
OR AS NOTED
-ALL SCREWS #10, LENGTH PER DRAWING
OR AS NOTED

OR AS NOTED -ALL CONCRETE TO BE 3500 PSI (MIN.)

10x20 Wood Pavilion **Hip Roof**

Building Size

BYS P.O. #####

Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333

Site Address





The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

March 21, 2024


SHEET NO. A-1


m.J.P.

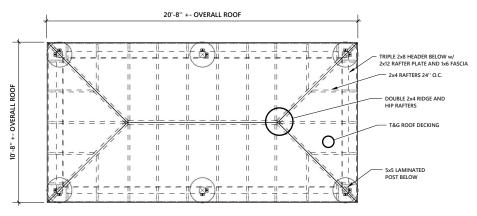



ROOF FRAMING PLAN





ASPHALT SHINGLES (2) 2x4 RIDGE POLE WARRIOR ROOFING ELEPHANT SKIN ROOF UNDERLAYMENT 1x6 T&G ROOF DECKING 2x4 RAFTERS @ 24" O.C. (2) 2x4 HIP RAFTERS 10'-10 1/2"+- OVERALL HEIGHT 2x12 RAFTER PLATE 5/4 x 6 FASCIA BOARD (3) 2x8 HEADER POST HEIGHT STEEL L-BRACKET TO ATTACH POST TO -CONCRETE FOOTING; USE (2) PER POST (SEE L-BRACKET DETAIL) ..0 œ 1/8" THICK STAINLESS STEEL STAND-OFF PLATE BETWEEN BASE OF POST AND CONCRETE TOP OF FOOTING LINE 16" DIA.x 36" DEEP FOOTING AT EACH POST LOCATION **CROSS SECTION** (TOTAL OF 6) 16"

Special Notes/Co	mments
------------------	--------

	Building Size	Site Address
	10x20 Wood Pavilion Hip Roof BYS P.O. #####	Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

March 21, 2024

SHEET NO. A-2

m.J.P.