


## **LEFT AND RIGHT ELEVATION**

## **FRONT AND REAR ELEVATION**





PRESSURE TREATED SOUTHERN PINE #1, APPEARANCE GRADE WESTERN RED CEDAR, OR AS SELECTED OR OTHERWISE NOTED. -ATTACH EACH ROOF BOARD TO EACH FRAMING MEMBER w/ (2) 1/2" CROWN x 2" LEG x 16 GAUGE STAPLES OR (2) 2 1/2" WOOD SCREWS. -ATTACH WALL SHEATHING TO EACH FRAMING MEMBER w/ 8d NAILS 12" O.C. INTERMEDIATE AND 6" O.C. ALONG EDGES -ALL HARDWARE TO BE GALVINIZED, POWDER COATED, STAINLESS STEEL, OR AS NOTED -ALL SCREWS #10, LENGTH PER DRAWING OR AS NOTED

-ALL CONCRETE TO BE 3500 PSI (MIN.)

**GENERAL CONSTRUCTION NOTES:** -ALL STRUCTURAL LUMBER SHALL BE

Building Size	Site Address
10x20 Wood Pavilion Open Gable A-Frame	Customer Name 0011 Stuart Tarce City, State Zip-Code


111-222-3333


BYS P.O. #####

The Backyard Showcase
2604 Lincoln Highway E.
Ronks, PA 17572


March 21, 2024 m.J.P. SHEET NO.

A-1

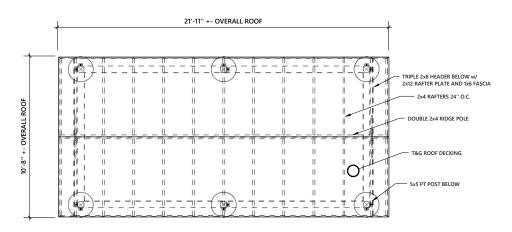



## **ROOF FRAMING PLAN**





ASPHALT SHINGLES (2) 2x4 RIDGE POLE WARRIOR ROOFING ELEPHANT SKIN ROOF UNDERLAYMENT -1x6 T&G ROOF DECKING-2x4 RAFTERS @ 24" O.C. +- OVERALL HEIGHT 2x12 RAFTER PLATE 5/4 x 6 FASCIA BOARD (3) 2x8 HEADER POST HEIGHT 10'-10 1/2" STEEL L-BRACKET TO ATTACH POST TO CONCRETE FOOTING; USE (2) PER POST ..0 (SEE L-BRACKET DETAIL) ō 1/8" THICK STAINLESS STEEL STAND-OFF PLATE BETWEEN BASE OF POST AND CONCRETE TOP OF FOOTING LINE 16" DIA.x 36" DEEP FOOTING AT EACH POST LOCATION — **CROSS SECTION** (TOTAL OF 6) 16"

Specia	lΝ	(otes	'Comments
--------	----	-------	-----------

Building Size	Site Address
10x20 Wood Pavilion Open Gable A-Frame BYS P.O. #####	Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

March 21, 2024

SHEET NO. A-2

m.J.P.