


LEFT AND RIGHT ELEVATION





| -ALL STRUCTURAL LUMBER SHALL BE |
|---------------------------------------|
| PRESSURE TREATED SOUTHERN PINE #1, |
| APPEARANCE GRADE WESTERN RED CEDAR, |
| OR AS SELECTED OR OTHERWISE NOTED. |
| -ATTACH EACH ROOF BOARD TO EACH |
| FRAMING MEMBER w/ (2) 1/2" CROWN x 2" |
| LEG x 16 GAUGE STAPLES OR (2) 2 1/2" |
| WOOD SCREWS. |
| -ATTACH WALL SHEATHING TO EACH |
| FRAMING MEMBER w/ 8d NAILS 12" O.C. |
| INTERMEDIATE AND 6" O.C. ALONG EDGES |
| -ALL HARDWARE TO BE GALVINIZED, |
| POWDER COATED, STAINLESS STEEL, |
| OR AS NOTED |
| -ALL SCREWS #10, LENGTH PER DRAWING |
| OR AS NOTED |
| -ALL CONCRETE TO BE 3500 PSI (MIN.) |
| |

GENERAL CONSTRUCTION NOTES:

| Building Size | Site Address |
|---------------------|-------------------|
| 12x14 Wood Pavilion | Customer Name |
| Hip Roof | 0011 Stuart Tarce |

BYS P.O. #####


City, State Zip-Code 111-222-3333

The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572


March 20, 2024

SHEET NO. A-1


m.J.P.

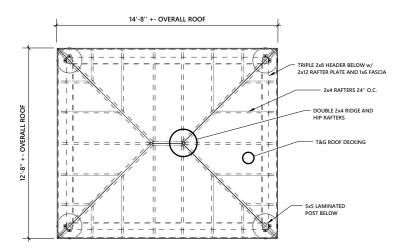

ROOF FRAMING PLAN







Building Size Site Address **Customer Name** 12x14 Wood Pavilion

Hip Roof

BYS P.O. #####

0011 Stuart Tarce City, State Zip-Code 111-222-3333



ASPHALT SHINGLES -

WARRIOR ROOFING ELEPHANT SKIN ROOF UNDERLAYMENT 1x6 T&G ROOF DECKING 2x4 RAFTERS @ 24" O.C. (2) 2x4 HIP RAFTERS 2x12 RAFTER PLATE

5/4 x 6 FASCIA BOARD (3) 2x8 HEADER

16" DIA.x 36" DEEP

FOOTING AT EACH POST LOCATION

(TOTAL OF 4)

| The Backyard Showcase |
|-------------------------|
| 2604 Lincoln Highway E. |
| Ronks, PA 17572 |

16''

March 20, 2024

m.J.P.

+- OVERALL HEIGHT

-2

POST HEIGHT

..0

SHEET NO. A-2

STEEL L-BRACKET TO ATTACH POST TO - CONCRETE FOOTING; USE (2) PER POST (SEE L-BRACKET DETAIL)

TOP OF FOOTING LINE

CROSS SECTION

1/8" THICK STAINLESS STEEL

STAND-OFF PLATE BETWEEN BASE OF POST AND CONCRETE

5/4 x 8 FASCIA BOARD

RAFTER CONNECTION DETAIL

NO SCALE

Special Notes/Comments

(3) GRK 3/8" RSS x 8" SCREWS -(3) 2x8 HEADER 5x5 CORNER POST, NOTCHED 1 3/8" ON OUTSIDE ONLY (3) 31/2" SCREWS (3) GRK 3/8" RSS x 8" SCREWS TOP VIEW (3) 2x8 HEADER (3) GRK 3/8" RSS > 8" SCREWS (TYP.) 5x5 CORNER

HEADER TO POST CONNECTION DETAIL

-(2) 2x4 RIDGE POLE