



**LEFT AND RIGHT ELEVATION** 



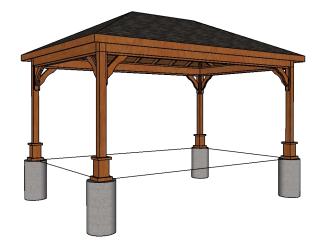

-ALL STRUCTURAL LUMBER SHALL BE
PRESSURE TREATED SOUTHERN PINE #1,
APPEARANCE GRADE WESTERN RED CEDAR
OR AS SELECTED OR OTHERWISE NOTED.
-ATTACH EACH ROOF BOARD TO EACH
FRAMING MEMBER w/ (2) 1/2" CROWN x 2"
LEG x 16 GAUGE STAPLES OR (2) 2 1/2"
WOOD SCREWS.
-ATTACH WALL SHEATHING TO EACH
FRAMING MEMBER w/ 8d NAILS 12" O.C.
INTERMEDIATE AND 6" O.C. ALONG EDGES
-ALL HARDWARE TO BE GALVINIZED,
POWDER COATED, STAINLESS STEEL,
OR AS NOTED
-ALL SCREWS #10, LENGTH PER DRAWING
OR AS NOTED
-ALL CONCRETE TO BE 3500 PSI (MIN.)

**GENERAL CONSTRUCTION NOTES:** 

**Building Size** Site Address 12x18 Wood Pavilion Hip-Roof

BYS P.O. #####

**Customer Name** 0011 Stuart Tarce City, State Zip-Code 111-222-3333





The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

March 12, 2024

SHEET NO. A-1


m.J.P.

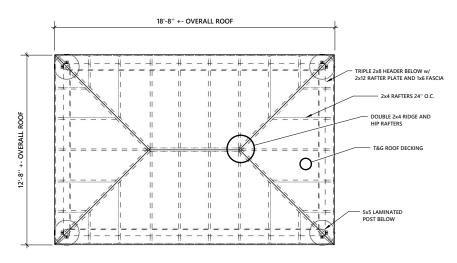




## HEADER TO POST CONNECTION DETAIL NO SCALE

## **ROOF FRAMING PLAN**





ASPHALT SHINGLES  WARRIOR ROOFING ELEPHANT SKIN ROOF UNDERLAYMENT  1x6 T&G ROOF DECKING  2x4 RAFTERS @ 24" O.C.  (2) 2x4 HIP RAFTERS  2x12 RAFTER PLATE	(2) 2x4 RIDGE PO	]6
5/4 x 6 FASCIA BOARD		
(3) 2x8 HEADER		
16" DIA.x 36" DEEP FOOTING AT EACH POST LOCATION — (TOTAL OF 4)	STEEL L-BRACKET TO ATTACH POST TO CONCRETE FOOTING; USE (2) PER POST (SEE L-BRACKET DETAIL)  1/8" THICK STAINLESS STEEL STAND-OFF PLATE BETWEEN BASE OF POST AND CONCRETE  TOP_OF_EOQTING LINE  CROSS SECTION	91 8 0" POST HEIGHT 11: 5" +- OVERALL HEIGHT

Special Notes/Comments

Building Size	Site Address	
12x18 Wood Pavilion Hip-Roof BYS P.O. #####	Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333	



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

March 12, 2024

SHEET NO. **A-2** 

m.J.P.