


## LEFT AND RIGHT ELEVATION





**GENERAL CONSTRUCTION NOTES:** -ALL STRUCTURAL LUMBER SHALL BE PRESSURE TREATED SOUTHERN PINE #1, APPEARANCE GRADE WESTERN RED CEDAR, OR AS SELECTED OR OTHERWISE NOTED. -ATTACH EACH ROOF BOARD TO EACH FRAMING MEMBER w/ (2) 1/2" CROWN x 2" LEG x 16 GAUGE STAPLES OR (2) 2 1/2" WOOD SCREWS. -ATTACH WALL SHEATHING TO EACH FRAMING MEMBER w/ 8d NAILS 12" O.C. INTERMEDIATE AND 6" O.C. ALONG EDGES -ALL HARDWARE TO BE GALVINIZED, POWDER COATED, STAINLESS STEEL, OR AS NOTED -ALL SCREWS #10, LENGTH PER DRAWING OR AS NOTED -ALL CONCRETE TO BE 3500 PSI (MIN.)

Building Size Site Address

Customer Name

14x18 Wood Pavilion

**Hip Roof** 

BYS P.O. #####

0011 Stuart Tarce City, State Zip-Code 111-222-3333





The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

March 22, 2024

SHEET NO. **A-1** 


m.J.P.

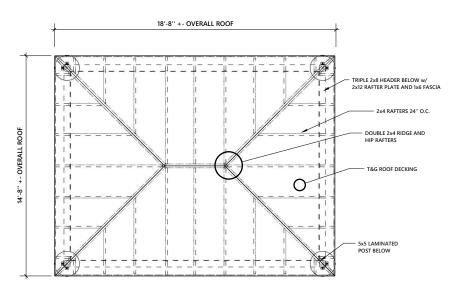




## HEADER TO POST CONNECTION DETAIL

## **ROOF FRAMING PLAN**





ASPHALT SHINGLES (2) 2x4 RIDGE POLE WARRIOR ROOFING ELEPHANT SKIN ROOF UNDERLAYMENT 1x6 T&G ROOF DECKING-2x4 RAFTERS @ 24" O.C. (2) 2x4 HIP RAFTERS 2x12 RAFTER PLATE +- OVERALL HEIGHT 5/4 x 6 FASCIA BOARD (3) 2x8 HEADER POST HEIGHT <u>.</u> STEEL L-BRACKET TO ATTACH POST TO - CONCRETE FOOTING; USE (2) PER POST (SEE L-BRACKET DETAIL) 2 ..0 1/8" THICK STAINLESS STEEL STAND-OFF PLATE BETWEEN BASE OF POST AND CONCRETE TOP OF FOOTING LINE 16" DIA.x 36" DEEP FOOTING AT EACH POST LOCATION **CROSS SECTION** (TOTAL OF 4) 16"

Special Notes/Comments

Building Size	Site Address
14x18 Wood Pavilion Hip Roof BYS P.O. #####	Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

March 22, 2024

SHEET NO. **A-2** 

m.J.P.