



## FRONT AND REAR ELEVATION



LEFT AND RIGHT ELEVATION



**GENERAL CONSTRUCTION NOTES:** -ALL STRUCTURAL LUMBER SHALL BE PRESSURE TREATED SOUTHERN PINE #1, APPEARANCE GRADE WESTERN RED CEDAR, OR AS SELECTED OR OTHERWISE NOTED. -ATTACH EACH ROOF BOARD TO EACH FRAMING MEMBER w/ (2) 1/2" CROWN x 2" LEG x 16 GAUGE STAPLES OR (2) 2 1/2" WOOD SCREWS. -ATTACH WALL SHEATHING TO EACH FRAMING MEMBER w/ 8d NAILS 12" O.C. INTERMEDIATE AND 6" O.C. ALONG EDGES -ALL HARDWARE TO BE GALVINIZED, POWDER COATED, STAINLESS STEEL,

OR AS NOTED -ALL SCREWS #10, LENGTH PER DRAWING OR AS NOTED -ALL CONCRETE TO BE 3500 PSI (MIN.)

**Building Size** Site Address

16x18 Wood Pavilion **Hip Roof** BYS P.O. #####

**Customer Name** 0011 Stuart Tarce City, State Zip-Code 111-222-3333




The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572


July 9, 2024

m.J.P.

SHEET NO.

A-1

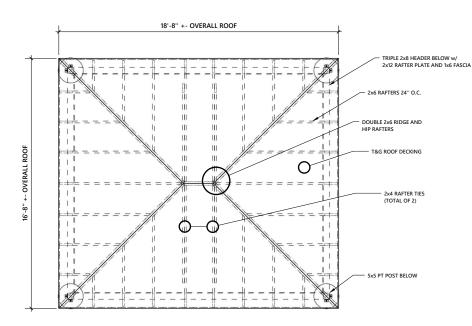




HEADER TO POST CONNECTION DETAIL

## **ROOF FRAMING PLAN**





(2) 2x6 RIDGE POLE ASPHALT SHINGLES 1x6 T&G ROOF DECKING 2x6RAFTERS @ 24" O.C., (2) 2x6 HIP RAFTERS (1) SIMPSON A23Z ANGLE AT EACH RAFTER, (2) AT DOUBLE 2x6 HIP RAFTERS FASTEN RAFTER TIE 2x4 RAFTER TIE TO EACH RAFTER w/ 1x6 FASCIA BOARD (8) 2 1/2" WOOD 2x12 RAFTER PLATE SCREWS (3) 2x8 HEADER POST HEIGHT 5x5 POSTS 15'-01/4" POST CENTERS STEEL L-BRACKET TO ATTACH POST TO FOOTING; 1/8" THICK STAINLESS 4" THICK CONCTRETE SLAB STEEL PLATE BETWEEN BOTTOM OF POST AND CONCRETE (OVERALL SIZE TBD BY OWNER) TOP OF FOOTING LINE DIA. x DEEP CONCRETI PIER FOOTING AT EACH CRUSHED STONE BASE **CROSS SECTION** 

Special Notes/Comments

Building Size	Site Address	
16x18 Wood Pavilion Hip Roof BYS P.O. #####	Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333	



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

July 9, 2024

 $\mathcal{G}.\mathcal{P}.$  SHEET NO.  $\mathbf{A-2}$