


FRONT AND REAR ELEVATION







-ALL STRUCTURAL LUMBER SHALL BE PRESSURE TREATED SOUTHERN PINE #1, APPEARANCE GRADE WESTERN RED CEDAR, OR AS SELECTED OR OTHERWISE NOTED. -ATTACH EACH ROOF BOARD TO EACH FRAMING MEMBER w/ (2) 1/2" CROWN x 2" LEG x 16 GAUGE STAPLES OR (2) 2 1/2" WOOD SCREWS. -ATTACH WALL SHEATHING TO EACH FRAMING MEMBER w/ 8d NAILS 12" O.C. INTERMEDIATE AND 6" O.C. ALONG EDGES -ALL HARDWARE TO BE GALVINIZED, POWDER COATED, STAINLESS STEEL, OR AS NOTED -ALL SCREWS #10, LENGTH PER DRAWING OR AS NOTED -ALL CONCRETE TO BE 3500 PSI (MIN.)

GENERAL CONSTRUCTION NOTES:

Building Size Site Address

18x18 Wood Pavilion **Hip Roof** BYS P.O. #####

Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333





The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

July 9, 2024


SHEET NO. A-1


m.J.P.

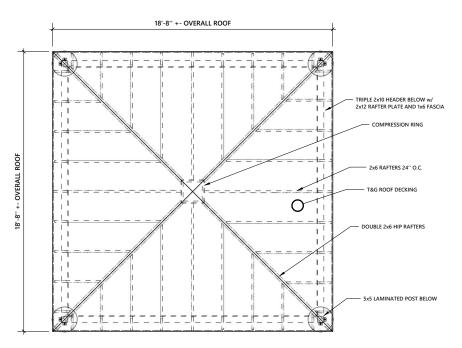

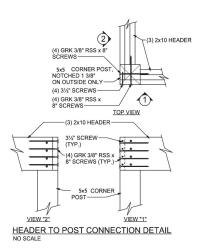

ROOF FRAMING PLAN





ASPHALT SHINGLES 1x6 T&G ROOF DECKING 2x6RAFTERS @ 24" O.C., (2) 2x6 HIP RAFTERS COMPRESSION (1) SIMPSON A23Z ANGLE AT EACH RAFTER, (2) AT DOUBLE 2x6 HIP RAFTERS 1x6 FASCIA BOARD 2x12 RAFTER PLATE (3) 2x10 HEADER 8'-0" POST HEIGHT 5x5 PT POSTS 17'-0 1/4" POST CENTERS STEEL L-BRACKET TO ATTACH POST TO FOOTING; USE (2) PER POST——— (SEE L-BRACKET DETAIL) 1/8" THICK STAINLESS 4" THICK CONCTRETE SLAB STEEL PLATE BETWEEN (OVERALL SIZE TBD BY OWNER) BOTTOM OF POST AND CONCRETE TOP OF FOOTING LINE DIA. x DEEP CONCRET PIER FOOTING AT EACH POST LOCATION CRUSHED STONE BASE **CROSS SECTION**

Special Notes/Comments

Building Size	Site Address
18x18 Wood Pavilion Hip Roof BYS P.O. #####	Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

July 9, 2024

. J. Р. A-2