

15' 6 1/8" CENTER-CENTER

15' 6 1/8" CENTER-CENTER

31' 0 1/4" CENTER-CENTER POSTS


LEFT AND RIGHT ELEVATION


FRONT AND REAR ELEVATION



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

January 31, 2023

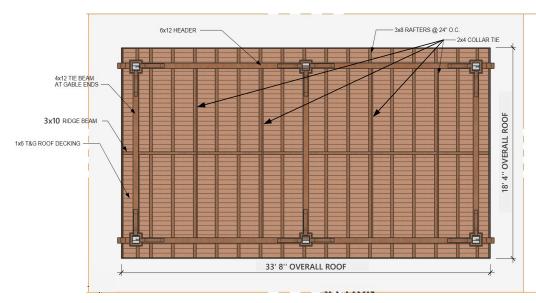




POST L BRACKET DETAIL

NO SCALE

ROOF FRAMING PLAN

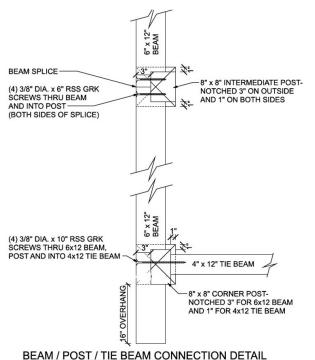



ASPHALT SHINGLES 3X10 RIDGE BEAM WARRIOR ROOFING ELEPHANT SKIN UNDERLAYMENT (1) 3/8" DIA.X5 1/8" LONG RSS GRK SCREW THRU TOP OF 1X6 T&G ROOF DECKING RAFTER INTO RIDGE BEAM 3X8 RAFTER @ 24" O.C. ATTACH EACH RAFTER TO 6X12 BEAM w/(2)#10X 3 1/2" -2x4 COLLAR TIE (8) 16d (3 1/2") (SEE ROOF FRAMING PLAN) NAILS EACH END SCREWS TOE-NAILED EACH SIDE (4 TOTAL) AND (1) 3/8"DIA. x8" LONGRSS GRK SCREW THRU TOP OF RAFTER INTO BEAM 9'-0" TOTAL POST HEIGHT 4X12 TIE BEAM AT GABLE ENDS, 16" BEARS ON 1" POST NOTCH 8'-0" CLEARANCE 6X12 BEAM, NOTCHED 3" AT POST (SEE DETAIL) STEEL L-BRACKET TO ATTACH POST TO CONCRETE FOOTING: USE (2) PER POST (SEE L-BRACKET DETAIL) -TOP OF CONCRETE FOOTING LINE 1/8" THICK STAINLESS STEEL CONCRETE FOOTING AT PLATE BETWEEN BOTTOM ALL POST LOCATIONS OF POST AND CONCRETE (TOTAL OF 6)

CROSS SECTION

Building Size	Site Address	Special Notes/Comments
16x32 Grand Escape Timber Pavilion BYS P.O. #xxxxx	XXXXXXXXXX xxxxxxxxxxx xxxxxxxxxxx xxxxxx	



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

January 31, 2023