


FRONT AND REAR ELEVATION





GENERAL CONSTRUCTION NOTES: -ALL STRUCTURAL LUMBER SHALL BE PRESSURE TREATED SOUTHERN PINE #2 OR BETTER, UNLESS OTHERWISE NOTED. -ANY WOOD IN CONTACT WITH MASONRY OR GROUND CONTACT TO BE PRESSURE-TREATED WOOD. -ATTACH EACH ROOF BOARD TO EACH FRAMING MEMBER w/ (2) 1/2" CROWN x 2" LEG x 16 GAUGE STAPLES OR (2) 2 1/2" WOOD SCREWS.

-ATTACH WALL SHEATHING TO EACH FRAMING MEMBER w/ 8d NAILS 12" O.C. INTERMEDIATE AND 6" O.C. ALONG EDGES -ALL HARDWARE TO BE GALVINIZED, POWDER COATED, STAINLESS STEEL, OR AS NOTED -ALL SCREWS #10, LENGTH PER DRAWING OR AS NOTED

-ALL CONCRETE TO BE 3500 PSI (MIN.)

Building Size Site Address

12x20 Vinyl Pavilion Open Gable A-Frame BYS P.O. #####

Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333





The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

December 5, 2023


m.J.P.


SHEET NO. A-1

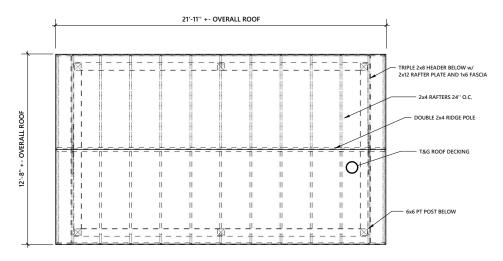



ROOF FRAMING PLAN





WARRIOR ROOFING ELEPHANT SKIN ROOF UNDERLAYMENT 1x6 T&G ROOF DECKING 2x4 RAFTERS @ 24" O.C.	(2) 2x4 RIDGE PC	+
2x12 RAFTER PLATE 5/4 x 6 FASCIA BOARD (3) 2x8 HEADER		ST HEIGHT ST. OVERALL HEIGHT
	STEEL L-BRACKET TO ATTACH POST TO CONCRETE FOOTING; USE (2) PER POST (SEE L-BRACKET DETAIL) 1/8" THICK STAINLESS STEEL STAND-OFF PLATE BETWEEN BASE OF POST AND CONCRETE	8' 0" POST HEIGHT
16" DIA.x 36" DEEP FOOTING AT EACH POST LOCATION (TOTAL OF 6)	CROSS SECTION	16"

Special Notes/Comments

Building Size	Site Address
12x20 Vinyl Pavilion Open Gable A-Frame BYS P.O. ######	Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

m.J.P.

December 5, 2023

SHEET NO.

A-2