


LEFT AND RIGHT ELEVATION



DOUBLE 2x8 BRACE DETAIL

| GENERAL CONSTRUCTION NOTES: |
|---------------------------------------|
| -ALL STRUCTURAL LUMBER SHALL BE |
| PRESSURE TREATED SOUTHERN PINE #1, |
| APPEARANCE GRADE WESTERN RED CEDAR |
| OR AS SELECTED OR OTHERWISE NOTED. |
| -ATTACH EACH ROOF BOARD TO EACH |
| FRAMING MEMBER w/ (2) 1/2" CROWN x 2" |
| LEG x 16 GAUGE STAPLES OR (2) 2 1/2" |
| WOOD SCREWS. |
| -ATTACH WALL SHEATHING TO EACH |
| FRAMING MEMBER w/ 8d NAILS 12" O.C. |
| INTERMEDIATE AND 6" O.C. ALONG EDGES |
| -ALL HARDWARE TO BE GALVINIZED, |
| POWDER COATED, STAINLESS STEEL, |
| OR AS NOTED |
| -ALL SCREWS #10, LENGTH PER DRAWING |
| OR AS NOTED |
| -ALL CONCRETE TO BE 3500 PSI (MIN.) |

Building Size Site Address **Customer Name** 12x18 Wood Pavilion 0011 Stuart Tarce Open Gable A-Frame City, State Zip-Code BYS P.O. ##### 111-222-3333





The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

m.J.P.


SHEET NO. A-1


March 12, 2024

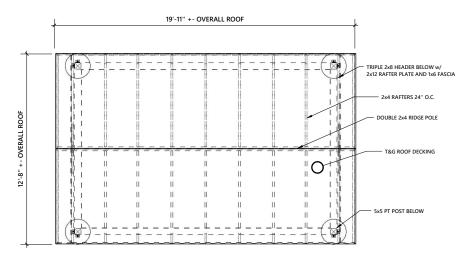



ROOF FRAMING PLAN





ASPHALT SHINGLES (2) 2x4 RIDGE POLE WARRIOR ROOFING ELEPHANT SKIN ROOF UNDERLAYMENT -1x6 T&G ROOF DECKING-2x4 RAFTERS @ 24" O.C. 2x12 RAFTER PLATE OVERALL HEIGHT 5/4 x 6 FASCIA BOARD (3) 2x8 HEADER POST HEIGHT -5 STEEL L-BRACKET TO ATTACH POST TO CONCRETE FOOTING; USE (2) PER POST .. (SEE L-BRACKET DETAIL) ō 1/8" THICK STAINLESS STEEL STAND-OFF PLATE BETWEEN BASE OF POST AND CONCRETE TOP OF FOOTING LINE 16" DIA.x 36" DEEP FOOTING AT EACH POST LOCATION — **CROSS SECTION** (TOTAL OF 4) 16"

| Specia | lΝ | (otes | 'Comments |
|--------|----|-------|-----------|
|--------|----|-------|-----------|

| Building Size | Site Address | | |
|---|--|--|--|
| 12x18 Wood Pavilion Open Gable A-Frame BYS P.O. ##### | Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333 | | |



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

March 12, 2024

SHEET NO. A-2

m.J.P.