



FRONT AND REAR ELEVATION



LEFT AND RIGHT ELEVATION



DOUBLE 2x8 BRACE DETAIL



-ALL STRUCTURAL LUMBER SHALL BE PRESSURE TREATED SOUTHERN PINE #1, APPEARANCE GRADE WESTERN RED CEDAR, OR AS SELECTED OR OTHERWISE NOTED. -ATTACH EACH ROOF BOARD TO EACH FRAMING MEMBER w/ (2) 1/2" CROWN x 2" LEG x 16 GAUGE STAPLES OR (2) 2 1/2" WOOD SCREWS. -ATTACH WALL SHEATHING TO EACH FRAMING MEMBER w/ 8d NAILS 12" O.C. INTERMEDIATE AND 6" O.C. ALONG EDGES -ALL HARDWARE TO BE GALVINIZED, POWDER COATED, STAINLESS STEEL, OR AS NOTED -ALL SCREWS #10, LENGTH PER DRAWING OR AS NOTED -ALL CONCRETE TO BE 3500 PSI (MIN.)

GENERAL CONSTRUCTION NOTES:

Building Size Site Address

10x18 Wood Pavilion Hip-Roof BYS P.O. #####


Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333




The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

March 22, 2024


SHEET NO. A-1

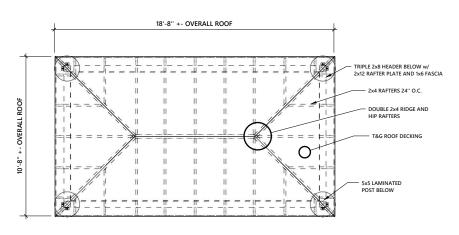




$\underset{\mathsf{NO}\,\mathsf{SCALE}}{\textbf{HEADER TO POST CONNECTION DETAIL}}$

ROOF FRAMING PLAN





WARRIOR ROOFING ELEPHANT SKIN ROOF UNDERLAYMENT 1x6 T&G ROOF DECKING 2x4 RAFTERS @ 24" O.C. (2) 2x4 HIP RAFTERS 2x12 RAFTER PLATE 5/4 x 6 FASCIA BOARD (3) 2x8 HEADER	STEEL L-BRACKET TO ATTACH POST TO CONCRETE FOOTING; USE (2) PER POST (SEE L-BRACKET DETAIL) 1/8" THICK STAINLESS STEEL STAND-OFF PLATE BETWEEN BASE OF POST AND CONCRETE TOP OF FOOTING LINE	8: 0" POST HEIGHT 10' 10 1/2" +- OVERALL HEIGHT
16" DIA.x 36" DEEP FOOTING AT EACH POST LOCATION (TOTAL OF 4)	CROSS SECTION	<u>58</u>

Special Notes/Comments

Building Size	Site Address	
10x18 Wood Pavilion Hip-Roof BYS P.O. #####	Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333	



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

March 22, 2024

SHEET NO. **A-2**

m.J.P.