


## LEFT AND RIGHT ELEVATION



-ALL STRUCTURAL LUMBER SHALL BE
PRESSURE TREATED SOUTHERN PINE #1,
APPEARANCE GRADE WESTERN RED CEDAR
OR AS SELECTED OR OTHERWISE NOTED.
-ATTACH EACH ROOF BOARD TO EACH
FRAMING MEMBER w/ (2) 1/2" CROWN x 2"
LEG x 16 GAUGE STAPLES OR (2) 2 1/2"
WOOD SCREWS.
-ATTACH WALL SHEATHING TO EACH
FRAMING MEMBER w/ 8d NAILS 12" O.C.
INTERMEDIATE AND 6" O.C. ALONG EDGES
-ALL HARDWARE TO BE GALVINIZED,
POWDER COATED, STAINLESS STEEL,
OR AS NOTED
-ALL SCREWS #10, LENGTH PER DRAWING
OR AS NOTED
-ALL CONCRETE TO BE 3500 PSI (MIN.)

GENERAL CONSTRUCTION NOTES:

**Building Size** Site Address **Customer Name** 14x18 Wood Pavilion 0011 Stuart Tarce Open Gable A-Frame City, State Zip-Code BYS P.O. ##### 111-222-3333





The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

March 22, 2024


SHEET NO. A-1


m.J.P.

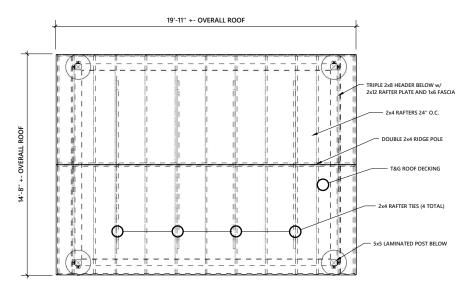



## **ROOF FRAMING PLAN**





ASPHALT SHINGLES WARRIOR ROOFING ELEPHANT SKIN ROOF UNDERLAYMENT (2) 2x4 RIDGE POLE 1x6 T&G ROOF DECKING 2x4 RAFTERS 24" O.C. -HEIGHT 2x12 RAFTER PLATE FASTEN RAFTER TIE 2x4 RAFTER TIE 5/4 x 6 FASCIA BOARD TO EACH RAFTER w/ APPROX. OVERALL (6) 2 1/2" WOOD (3) 2x8 HEADER SCREWS 8'-0" POST HEIGHT 5x5 POSTS 13'-01/4" POST CENTERS 12'-0" STEEL L-BRACKET TO ATTACH POST TO CONCRETE-USE (2) PER POST (SEE DETAIL) 4" THICK CONCTRETE SLAB 16" DIA.x 36" DEEP FOOTER (OVERALL SIZE TBD BY OWNER) @ EACH POST LOCATION (TOTAL OF 4) 4" CRUSHED STONE BASE 16" **CROSS SECTION** 

Special Notes/Comments

Building Size	Site Address
14x18 Wood Pavilion Open Gable A-Frame BYS P.O. #####	Customer Name 0011 Stuart Tarce City, State Zip-Code 111-222-3333



The Backyard Showcase 2604 Lincoln Highway E. Ronks, PA 17572

March 22, 2024

янеет NO. **А-2**